

MILESTONE 2 DOCUMENTATION

CMPG 325

Molema Citrus Estates (Rustenburg)

CLIENT ID	CLI-037
PROJECT ID	CMPG325-2026-037
STUDENT	Edzani Maisha
MILESTONE DEADLINE	02 October 2026
IMPLEMENTATION PLATFORM	Cisco Packet Tracer
PACKET FILE TRACER	Molema_Citrus_Phase2.pkt

Milestone 2 scope: implementation, configuration and testing evidence

1. Introduction and Phase 2 Objective

Implementing the authorized Phase 1 network architecture for Molema Citrus Estates in Cisco Packet Tracer and confirming that the configured services functioning as planned were the main objectives of Milestone 2. Device connectivity, VLAN and SVI configuration, trunking, DHCP services, Layer 3 routing, and the use of access-control lists for network isolation were among the tasks finished during this phase. In order to verify addressing, gateway reachability, allowed communication, and purposefully restricted communication, testing was then carried out on real Packet Tracer end devices. This document records only the implementation and testing accomplished for Milestone.

2.

2. Packet Tracer Implementation

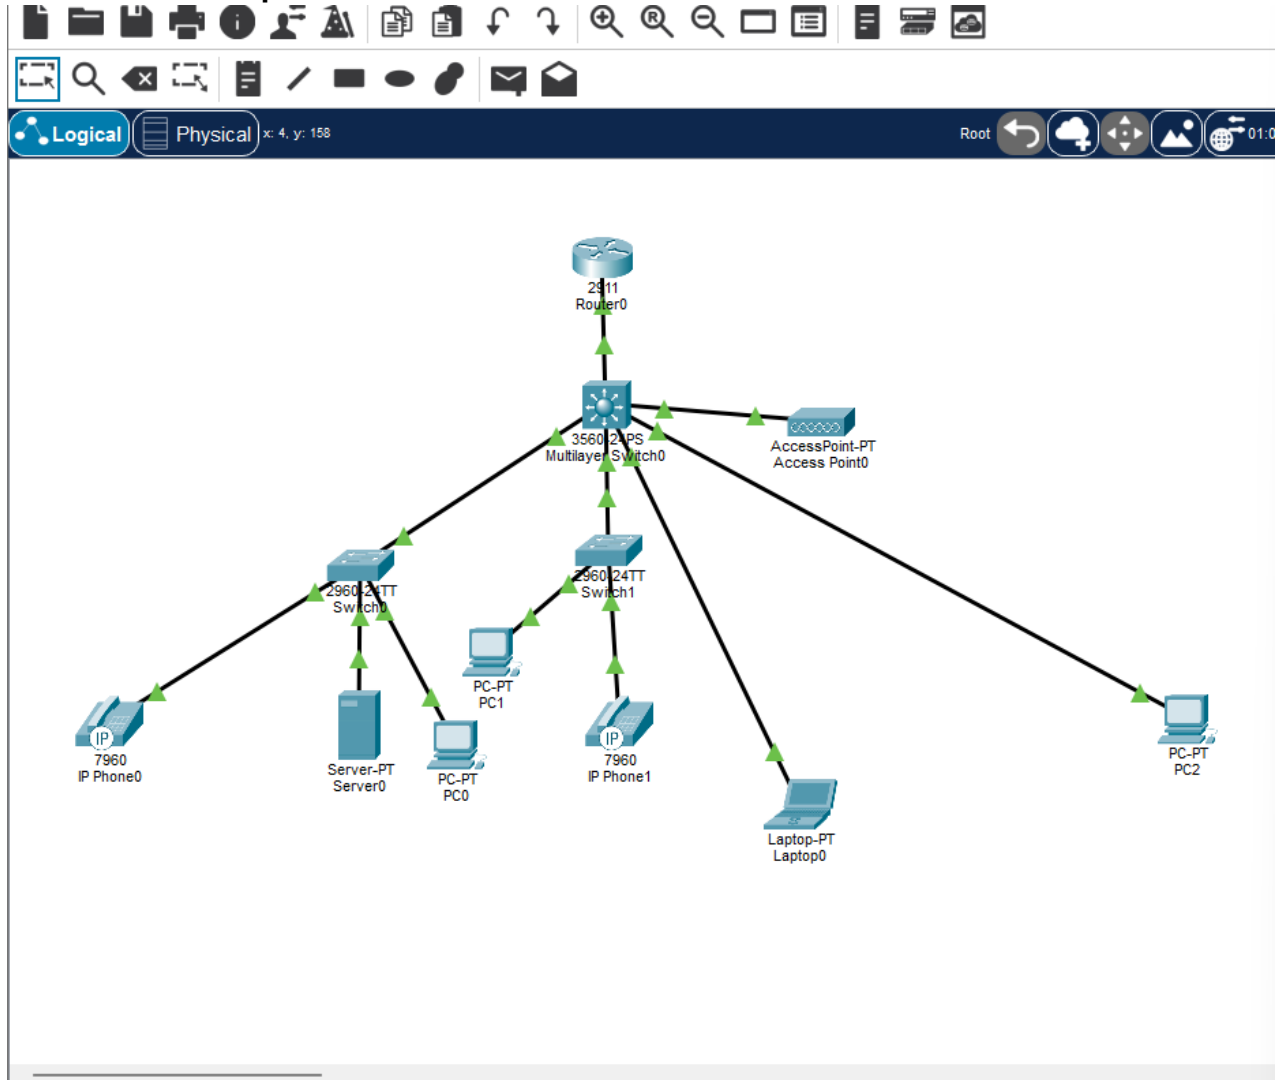


Figure 1: Completed Molema Citrus Estates Packet Tracer topology

The implemented topology uses Router0 as the edge router and a Cisco 3560 multilayer switch as the core Layer 3 device. The core switch provides the VLAN gateway interfaces, DHCP services, inter-VLAN routing and ACL enforcement. Two Cisco 2960 access switches provide user and voice access for the Admin and Packhouse areas. AccessPoint0 provides the wireless access component, while Server0, PCs, IP phones and Laptop0 represent the organization's end systems and test devices.

Device	Role	Implementation purpose
--------	------	------------------------

Router0	Edge router	Connects the core network to the routed edge link; 192.168.26.121/30 on Gi0/0.
CoreSwitch	Layer 3 core switch	Hosts SVIs, DHCP pools, routing, trunks and the Guest/Voice ACLs.
AdminSwitch	Access switch	Carries Admin, Management and Voice traffic to the core over a trunk.
PackhouseSwitch	Access switch	Carries Packhouse and Voice traffic to the core over a trunk.
AccessPoint0	Wireless AP	Provides the wireless access component of the implemented topology.
Server0	Server	Configured as a network server endpoint with a static IPv4 address.
PC0 / PC1 / Guest PC	Client endpoints	Used to verify DHCP, routing and ACL behaviour.
IP Phone0 / IP Phone1	Voice endpoints	Used to verify Voice VLAN addressing and connectivity.
Laptop0	Management endpoint	Represents the management network endpoint connected at the core.

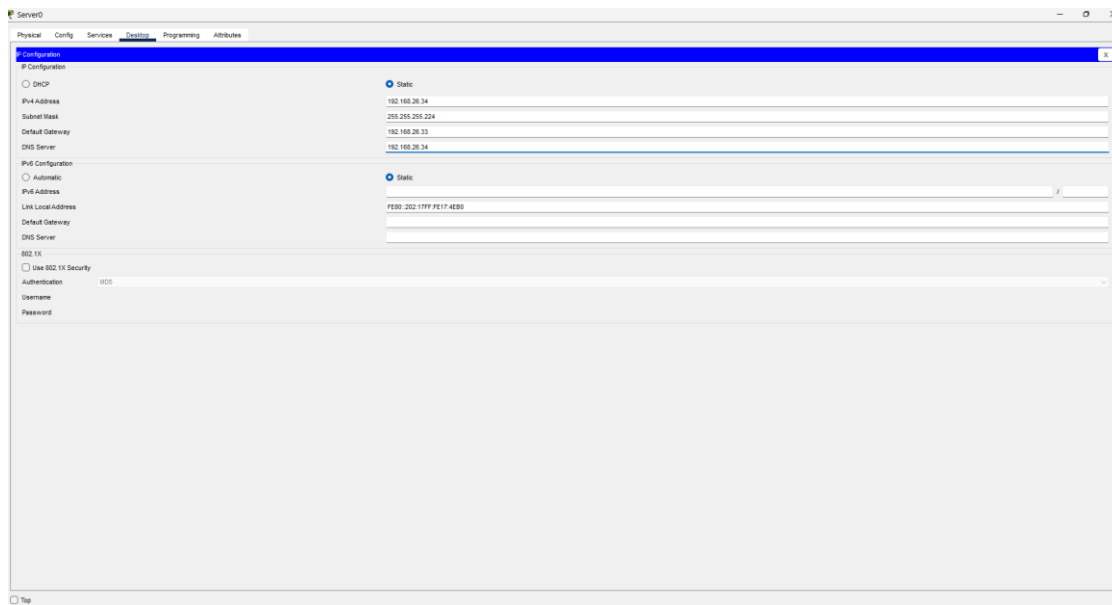


Figure 1: Server0 static IP configuration evidence

3. VLAN and IP Implementation

Five VLANs were implemented to separate management, administration, packhouse, voice and guest traffic. The default gateway for each VLAN is an SVI on the CoreSwitch, allowing the multilayer switch to perform Layer 3 forwarding while keeping the logical networks separated

VLAN	Purpose	Subnet	SVI / Gateway	Mask
10	Management	192.168.26.112/29	192.168.26.113	255.255.255.248
20	Admin	192.168.26.32/27	192.168.26.33	255.255.255.224
30	Packhouse	192.168.26.0/27	192.168.26.1	255.255.255.224
40	Voice	192.168.26.64/27	192.168.26.65	255.255.255.224
50	Guest	192.168.26.96/28	192.168.26.97	255.255.255.240

```

CoreSwitch#CoreSwitch
Translating "CoreSwitch"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

CoreSwitch#show ip interface brief
Interface IP-Address OK? Method Status Protocol
FastEthernet0/1 unassigned YES unset up up
FastEthernet0/2 unassigned YES unset down down
FastEthernet0/3 unassigned YES unset down down
FastEthernet0/4 unassigned YES unset down down
FastEthernet0/5 unassigned YES unset up up
FastEthernet0/6 unassigned YES unset up up
FastEthernet0/7 unassigned YES unset up up
FastEthernet0/8 unassigned YES unset down down
FastEthernet0/9 unassigned YES unset down down
FastEthernet0/10 unassigned YES unset down down
FastEthernet0/11 unassigned YES unset down down
FastEthernet0/12 unassigned YES unset down down
FastEthernet0/13 unassigned YES unset down down
FastEthernet0/14 unassigned YES unset down down
FastEthernet0/15 unassigned YES unset down down
FastEthernet0/16 unassigned YES unset down down
FastEthernet0/17 unassigned YES unset down down
FastEthernet0/18 unassigned YES unset down down
FastEthernet0/19 unassigned YES unset down down
FastEthernet0/20 unassigned YES unset down down
FastEthernet0/21 unassigned YES unset down down
FastEthernet0/22 unassigned YES unset down down
FastEthernet0/23 unassigned YES unset down down
FastEthernet0/24 unassigned YES unset down down
GigabitEthernet0/1 192.168.26.122 YES manual up up
GigabitEthernet0/2 unassigned YES unset administratively down down
Vlan1 unassigned YES unset administratively down down
Vlan10 192.168.26.113 YES manual up up
Vlan20 192.168.26.33 YES manual up up
Vlan30 192.168.26.1 YES manual up up
Vlan40 192.168.26.65 YES manual up up
Vlan50 192.168.26.97 YES manual up up
CoreSwitch

```

Copy Paste

Figure 2: SVI verification: all five VLAN interfaces confirmed up/up

4. DHCP Configuration and Testing

DHCP was configured directly On the CoreSwitch for the Admin, Packhouse, Voice and Guest networks. Gateway and infrastructure addresses were excluded from dynamic allocation. The voice pool also included option 150, using the Voice SVI addresses as the configured TFTP/voice-services reference in the Packet Tracer implementation

```

ip dhcp pool ADMIN_POOL
network 192.168.26.32 255.255.255.224
default-router 192.168.26.33
dns-server 8.8.8.8

```

```

ip dhcp pool PACKHOUSE_POOL
network 192.168.26.0 255.255.255.224
default-router 192.168.26.1
dns-server 8.8.8.8

```

```

ip dhcp pool VOICE_POOL
network 192.168.26.64 255.255.255.224
default-router 192.168.26.65
option 150 ip 192.168.26.65
dns-server 8.8.8.8

```

```

ip dhcp pool GUEST_POOL
network 192.168.26.96 255.255.255.240
default-router 192.168.26.97
dns-server 8.8.8.8

```

The saved evidence confirms successful dynamic addressing on the Admin, Packhouse, Voice and Guest networks. Examples observed during testing included Admin client 192.168.26.40, Voice clients in the 192.168.26.64/27 range, and Guest client 192.168.26.101/28.

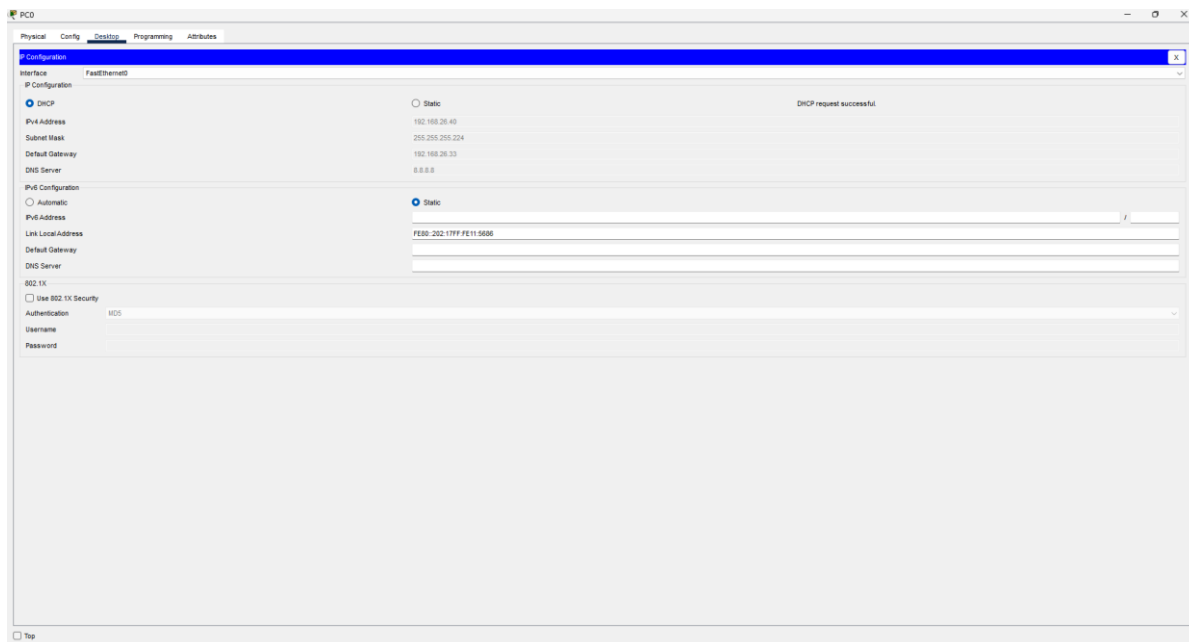


Figure 3: Admin VLAN 20 DHCP assignment on PC0

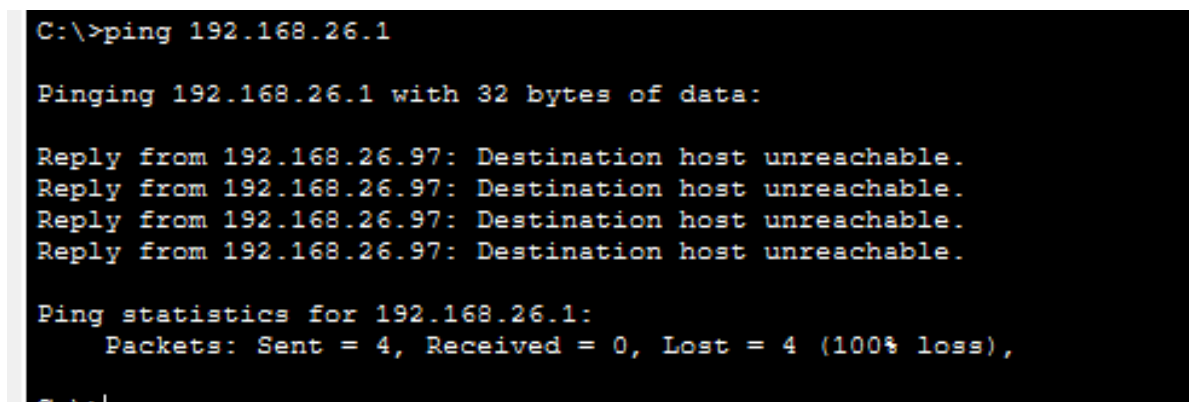


Figure 4: Packhouse VLAN 30 successful DHCP address assignment

```
1 subnet is currently in the pool
Current index      IP address range      Leased/Excluded/Total
192.168.26.97      192.168.26.97 - 192.168.26.110    0 / 4 / 14
CoreSwitch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
CoreSwitch(config)#interface vlan 40
CoreSwitch(config-if)#no ip access-group VOICE_ISOLATION in
CoreSwitch(config-if)#end
CoreSwitch#
%SYS-5-CONFIG_I: Configured from console by console

CoreSwitch#show ip dhcp binding
IP address      Client-ID/
                Hardware address      Lease expiration      Type
192.168.26.40    0002.1711.5686              --                    Automatic
192.168.26.70    0004.9A5A.88B1              --                    Automatic
CoreSwitch#show ip dhcp binding
IP address      Client-ID/
                Hardware address      Lease expiration      Type
192.168.26.40    0002.1711.5686              --                    Automatic
192.168.26.71    00E0.B0E9.5680              --                    Automatic
192.168.26.70    0004.9A5A.88B1              --                    Automatic
CoreSwitch#
```

Copy

Paste

Figure 5: Voice VLAN 40 DHCP verification

```

1 subnet is currently in the pool
Current index      IP address range      Leased/Excluded/Total
192.168.26.97      192.168.26.97 - 192.168.26.110  0 / 4 / 14
CoreSwitch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
CoreSwitch(config)#interface vlan 40
CoreSwitch(config-if)#no ip access-group VOICE_ISOLATION in
CoreSwitch(config-if)#end
CoreSwitch#
%SYS-5-CONFIG_I: Configured from console by console

CoreSwitch#show ip dhcp binding
IP address      Client-ID/      Lease expiration      Type
                Hardware address
192.168.26.40    0002.1711.5686    --                     Automatic
192.168.26.70    0004.9A5A.88B1    --                     Automatic
CoreSwitch#show ip dhcp binding
IP address      Client-ID/      Lease expiration      Type
                Hardware address
192.168.26.40    0002.1711.5686    --                     Automatic
192.168.26.71    00E0.B0E9.5680    --                     Automatic
192.168.26.70    0004.9A5A.88B1    --                     Automatic
CoreSwitch#

```

Copy

Paste

Figure 6: Voice VLAN 40 DHCP verification

The screenshot shows the 'PC2' configuration window with the 'Desktop' tab selected. The 'IP Configuration' section is expanded, showing the 'FastEthernet0' interface. Under 'IP Configuration', the 'DHCP' radio button is selected, and a message states 'DHCP request successful.' The assigned IPv4 Address is 192.168.26.101, Subnet Mask is 255.255.255.240, Default Gateway is 192.168.26.97, and DNS Server is 8.8.8.8. The 'IPv6 Configuration' section shows 'Static' selected. The '802.1X' section has 'Use 802.1X Security' unchecked, with 'Authentication' set to 'MD5' and empty fields for 'Username' and 'Password'.

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.26.101

Subnet Mask 255.255.255.240

Default Gateway 192.168.26.97

DNS Server 8.8.8.8

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::201:C7FF:FE8B:8104

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

Figure 7: Guest VLAN 50 - Successful DHCP Address Assignment

5. Routing and Trunking

Inter-VLAN routing is performed by the CoreSwitch through the five SVIs. The command output verified that all SVIs were operational. Two 802.1Q trunks were also confirmed: CoreSwitch Gi0/2 carries VLANs 10, 20 and 40 toward the AdminSwitch, while CoreSwitch Fa0/1 carries VLANs 30 and 40 toward the PackhouseSwitch.

Core port	Connected area	Allowed VLANs	Status
Gi0/2	AdminSwitch	10, 20, 40	Trunking
Fa0/1	PackhouseSwitch	30, 40	Trunking

```
CoreSwitch# show interfaces trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/1     on        802.1q         trunking    1
Gig0/2    on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/1     30,40
Gig0/2    10,20,40

Port      Vlans allowed and active in management domain
Fa0/1     30,40
Gig0/2    10,20,40

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     30,40
Gig0/2    10,20,40

CoreSwitch#
```

Figure 6: CoreSwitch trunk VLAN verification

The routed point-to-point link between CoreSwitch Gi0/1 (192.168.26.122/30) and Router0 Gi0/0 (192.168.26.121/30) was operational. Router0 contained static routes back to all internal VLAN subnets through 192.168.26.122. Admin-to-Router0 testing succeeded, confirming reachability across the core-to-edge routed link.

```
CoreSwitch# show interfaces trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/1     on        802.1q         trunking    1
Gig0/2    on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/1     30,40
Gig0/2    10,20,40

Port      Vlans allowed and active in management domain
Fa0/1     30,40
Gig0/2    10,20,40

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     30,40
Gig0/2    10,20,40

CoreSwitch#
```

Figure 8: CoreSwitch trunk VLAN verification

The routed point-to-point link between CoreSwitch Gi0/1 (192.168.26.122/30) and Router0 Gi0/0 (192.168.26.121/30) was operational. Router0 contained static routes back to all internal VLAN subnets through 192.168.26.122. Admin-to-Router0 testing succeeded, confirming reachability across the core-to-edge routed link.

```

C:\>ping 192.168.26.121

Pinging 192.168.26.121 with 32 bytes of data:

Reply from 192.168.26.121: bytes=32 time=13ms TTL=254
Reply from 192.168.26.121: bytes=32 time<1ms TTL=254
Reply from 192.168.26.121: bytes=32 time<1ms TTL=254
Reply from 192.168.26.121: bytes=32 time<1ms TTL=254

Ping statistics for 192.168.26.121:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 3ms

C:\>|

```

Figure 9: Admin VLAN 20 to Router0 Connectivity Test - PASS

6. Assigned Feature - ACL Implementation

The assigned security feature was implemented using extended IPv4 access-control lists on the CoreSwitch. The objective was to isolate Guest and Voice traffic from protected internal VLANs while still allowing the traffic that was intentionally permitted by the design. The ACLs were applied inbound on the relevant SVIs so that restricted traffic is filtered as it enters the Layer 3 routing function

6.1 GUEST_ISOLATION

GUEST_ISOLATION is applied inbound on VLAN 50. DHCP request/response traffic is permitted first so that guest clients can obtain addressing. The ACL then denies Guest VLAN 50 (192.168.26.96/28) from reaching Packhouse VLAN 30, Admin VLAN 20, Voice VLAN 40 and Management VLAN 10. A final permit statement allows other IPv4 destinations not matched by the internal-deny rules. This order is important because ACL processing stops at the first matching entry.

```

ip access-list extended GUEST_ISOLATION
 permit udp any eq bootpc any eq bootps
 permit udp any eq bootps any eq bootpc
 deny ip 192.168.26.96 0.0.0.15 192.168.26.0 0.0.0.31
 deny ip 192.168.26.96 0.0.0.15 192.168.26.32 0.0.0.31
 deny ip 192.168.26.96 0.0.0.15 192.168.26.64 0.0.0.31
 deny ip 192.168.26.96 0.0.0.15 192.168.26.112 0.0.0.15
 permit ip 192.168.26.96 0.0.0.15 any

```

6.2 VOICE_ISOLATION

VOICE_ISOLATION is applied inbound on VLAN 40. As with the Guest ACL, DHCP traffic is permitted before the isolation rules. Voice VLAN 40 (192.168.26.64/27) is prevented from initiating traffic to Packhouse, Admin, Management and Guest networks. The final permit statement allows other destinations. Testing showed that a Voice test endpoint could reach its own gateway at 192.168.26.65 while attempts to reach the protected internal VLAN gateways were blocked.

```

ip access-list extended VOICE_ISOLATION
 permit udp any eq bootpc any eq bootps
 permit udp any eq bootps any eq bootpc
 deny ip 192.168.26.64 0.0.0.31 192.168.26.0 0.0.0.31
 deny ip 192.168.26.64 0.0.0.31 192.168.26.32 0.0.0.31
 deny ip 192.168.26.64 0.0.0.31 192.168.26.112 0.0.0.15
 deny ip 192.168.26.64 0.0.0.31 192.168.26.96 0.0.0.15
 permit ip 192.168.26.64 0.0.0.31 any

```

6.3 Placement rationale and verification

The ACLs were placed on the CoreSwitch rather than Router0 because the CoreSwitch is the Layer 3 gateway for the VLANs and therefore sees the inter-VLAN traffic at its source SVI. Applying each extended ACL inbound at the source VLAN stops prohibited traffic before it is routed across the internal network. The match counters increased during the ping tests, providing direct evidence that the deny and permit entries were processing real packets.

```
CoreSwitch#DHCPD-4-PING_CONFLICT: DHCP address conflict:  server pinged 192.168.26.100.

CoreSwitch#show access-lists GUEST_ISOLATION
Extended IP access list GUEST_ISOLATION
  permit udp any eq bootpc any eq bootps (6 match(es))
  permit udp any eq bootps any eq bootpc
  deny ip 192.168.26.96 0.0.0.15 192.168.26.0 0.0.0.31 (4 match(es))
  deny ip 192.168.26.96 0.0.0.15 192.168.26.32 0.0.0.31 (4 match(es))
  deny ip 192.168.26.96 0.0.0.15 192.168.26.64 0.0.0.31 (4 match(es))
  deny ip 192.168.26.96 0.0.0.15 192.168.26.112 0.0.0.15 (4 match(es))
  permit ip 192.168.26.96 0.0.0.15 any (7 match(es))

CoreSwitch#show access-lists VOICE_ISOLATION
Extended IP access list VOICE_ISOLATION
  permit udp any eq bootpc any eq bootps (4205 match(es))
  permit udp any eq bootps any eq bootpc
  deny ip 192.168.26.64 0.0.0.31 192.168.26.0 0.0.0.31 (4 match(es))
  deny ip 192.168.26.64 0.0.0.31 192.168.26.32 0.0.0.31 (4 match(es))
  deny ip 192.168.26.64 0.0.0.31 192.168.26.112 0.0.0.15 (4 match(es))
  deny ip 192.168.26.64 0.0.0.31 192.168.26.96 0.0.0.15 (4 match(es))
  permit ip 192.168.26.64 0.0.0.31 any (1407 match(es))

CoreSwitch#
```

Figure 10: ACL match-counter verification for Guest and Voice isolation

7. Testing and Troubleshooting Evidence

Testing was performed from actual Packet Tracer endpoints. A failed ping is recorded as a PASS when the security requirement intentionally requires that communication to be blocked. The table below therefore distinguishes functional failures from successful isolation behaviour.

Test	Expected result	Outcome	Evidence / interpretation
Admin client -> Admin gateway 192.168.26.33	Reachable	PASS	Gateway connectivity confirmed.
Admin -> Packhouse	Reachable	PASS	Inter-VLAN routing confirmed for permitted traffic.
Admin -> Router0 192.168.26.121	Reachable	PASS	Core-to-edge routing confirmed.
Voice test host -> Voice gateway 192.168.26.65	Reachable	PASS	Voice VLAN local gateway reachable.
Voice -> Admin	Blocked	PASS	VOICE_ISOLATION deny rule matched.
Voice -> Packhouse	Blocked	PASS	VOICE_ISOLATION deny rule matched.
Voice -> Guest	Blocked	PASS	VOICE_ISOLATION deny rule matched.
Voice -> Management	Blocked	PASS	VOICE_ISOLATION deny rule matched.
Guest -> Admin	Blocked	PASS	GUEST_ISOLATION deny rule matched.
Guest -> Packhouse	Blocked	PASS	GUEST_ISOLATION deny rule matched.
Guest -> Voice	Blocked	PASS	GUEST_ISOLATION deny rule matched.

Guest -> Management	Blocked	PASS	GUEST_ISOLATION deny rule matched.
Guest -> 8.8.8.8	Internet path unavailable	NOT VERIFIED	Router0 had no upstream/default Internet path; Internet success is not claimed.

```

C:\>ping 192.168.26.33 with 32 bytes of data:

Reply from 192.168.26.33: bytes=32 time=13ms TTL=255
Reply from 192.168.26.33: bytes=32 time<1ms TTL=255
Reply from 192.168.26.33: bytes=32 time<1ms TTL=255
Reply from 192.168.26.33: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.26.33:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 3ms

C:\>

```

Figure 11: Admin gateway connectivity - PASS

```

C:\>ping 192.168.26.1

Pinging 192.168.26.1 with 32 bytes of data:

Reply from 192.168.26.1: bytes=32 time<1ms TTL=255
Reply from 192.168.26.1: bytes=32 time<1ms TTL=255
Reply from 192.168.26.1: bytes=32 time<1ms TTL=255
Reply from 192.168.26.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.26.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>

```

Figure 12: Admin to Packhouse permitted inter-VLAN test - PASS

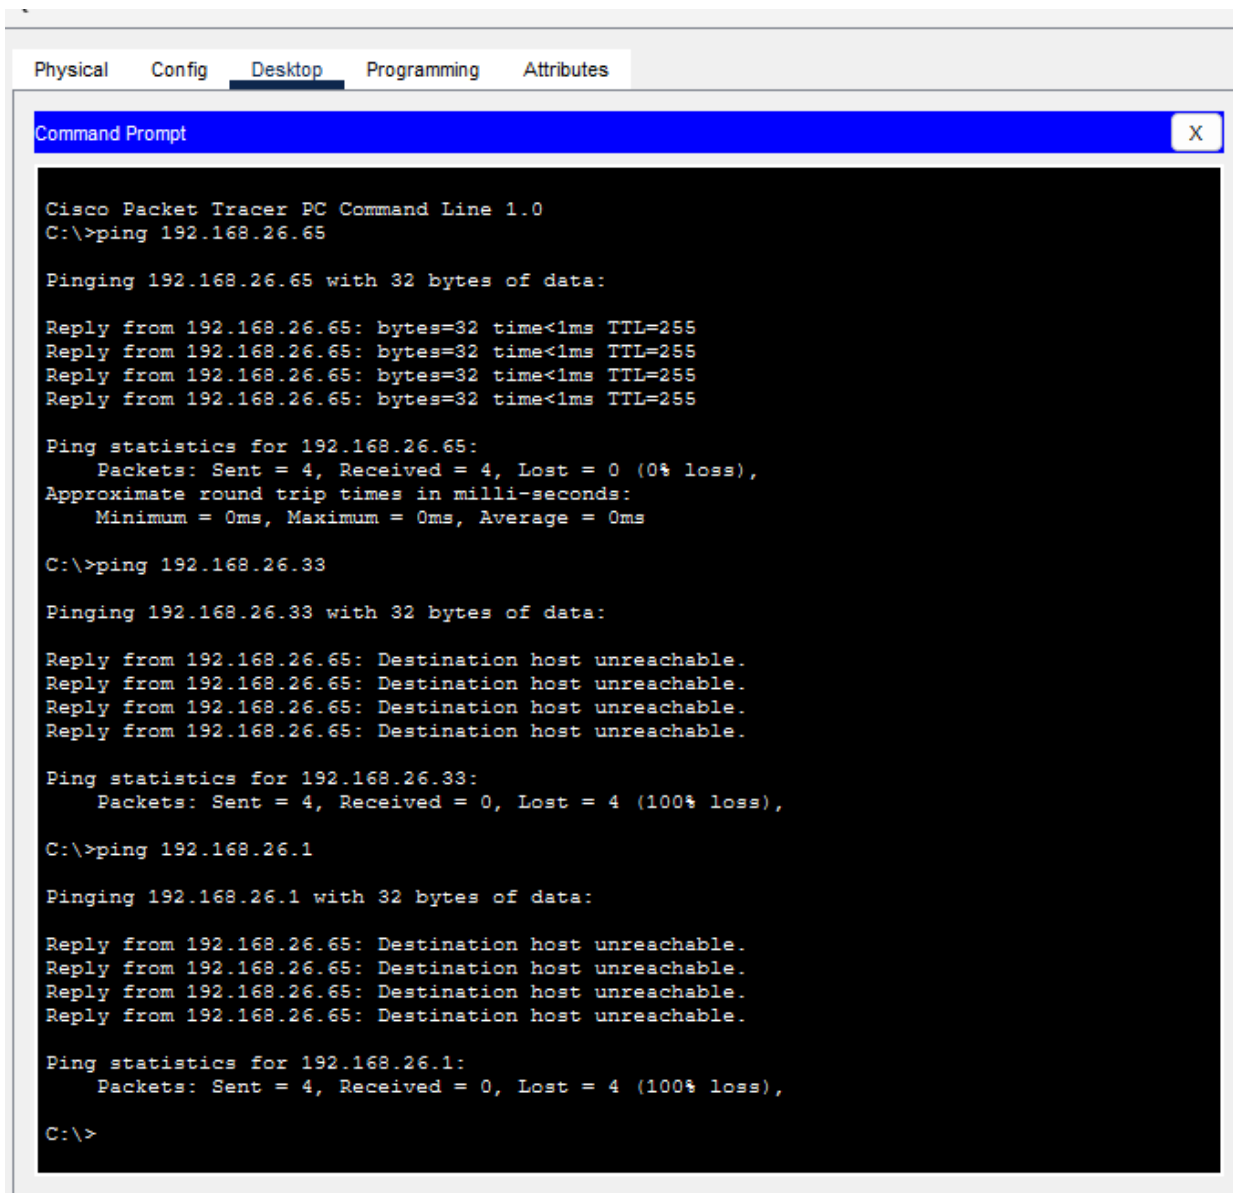


Figure 13: Voice VLAN 40 isolation: Admin and Packhouse blocked as intended

```
Command Prompt
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Ping statistics for 192.168.26.33:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.26.1
Pinging 192.168.26.1 with 32 bytes of data:
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Ping statistics for 192.168.26.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.26.65
Pinging 192.168.26.65 with 32 bytes of data:
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Ping statistics for 192.168.26.65:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.26.113
Pinging 192.168.26.113 with 32 bytes of data:
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Reply from 192.168.26.97: Destination host unreachable.
Ping statistics for 192.168.26.113:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>|
```

Figure 14: Guest VLAN 50 Internal VLAN Isolation Test - Access Blocked as Intended

7.1 Troubleshooting performed during implementation

DHCP failure after ACL activation: During testing, a client received an APIPA address (169.254.x.x) after the isolation ACL was applied. The ACL initially placed the broad permit/deny logic in an order that did not correctly accommodate DHCP. The ACL was rebuilt so the UDP BOOTP/DHCP permit statements appeared before the isolation rules. After the correction, the Guest client successfully received 192.168.26.101/28 and Voice DHCP bindings were also observed.

Unsupported show-command syntax: The command `show running-config interface vlan 40` produced an invalid-input error on the Packet Tracer IOS image. The configuration was instead verified using `show running-config`, where VLAN 40 and the inbound VOICE_ISOLATION application were visible.

Guest test port assigned to the wrong VLAN: The temporary test PC was moved between VLANs during testing. When Guest testing was required, CoreSwitch Fa0/7 was explicitly configured as an access port in VLAN 50 and verified with `show interfaces status` before repeating DHCP and ACL tests.

Internet reachability limitation: The internal network could reach Router0 at 192.168.26.121, but a ping to 8.8.8.8 returned `Destination host unreachable` from Router0. Router0's routing table showed the internal static routes but no gateway of last resort or simulated upstream Internet network. For this reason, Internet connectivity is documented as not verified rather than reported as a successful test.

8. Conclusion

Milestone 2 successfully converted the approved network design into a working Cisco Packet Tracer implementation for Molema Citrus Estates. The five VLAN SVIs were operational, the required trunks were verified, DHCP successfully assigned addresses to the tested Admin, Packhouse, Voice and Guest endpoints, and permitted routed communication was confirmed. The GUEST_ISOLATION and VOICE_ISOLATION ACLs were implemented on the CoreSwitch and their operation was demonstrated through blocked inter-VLAN tests and ACL match counters. The implementation also produced genuine troubleshooting evidence, including DHCP/ACL ordering corrections and validation of the edge-routing limitation. The working Molema_Citrus_Phase2.pkt file and this evidence document form the Milestone 2 submission package. Video and full GitHub portfolio evidence remain outside the scope of this document and can be completed for the later final-submission stage.

Appendix A - Evidence File Index

Evidence file	Purpose
01_Server0_Static_IP.png	Saved testing evidence
ACL Match Counter Verification – Guest and Voice Isolation.png	Saved testing evidence
Admin VLAN 20 – Router0 Connectivity PASS.png	Saved testing evidence
CoreSwitch Trunk VLAN Verification.png	Saved testing evidence
DHCP Verification for Voice VLAN 40 – IP Phones Successfully Assigned.png	Saved testing evidence
DHCP_PC0_VLAN20_SUCCESS.png	Saved testing evidence
Guest VLAN 50 Isolation – Internal VLAN Access Blocked.png	Saved testing evidence
Guest VLAN 50 – Successful DHCP Address Assignment.png	Saved testing evidence
Guest VLAN 50 → Admin VLAN – Access Denied.png	Saved testing evidence
Guest VLAN 50 → Management VLAN 10 – Access Blocked.png	Saved testing evidence
Guest VLAN 50 → Packhouse VLAN 30 – Access Blocked.png	Saved testing evidence
Guest VLAN 50 → Voice VLAN 40 – Access Blocked.png	Saved testing evidence
Packhouse IP Phone Port Configuration – Data VLAN 30 and Voice VLAN 40.png	Saved testing evidence
Packhouse VLAN 30 – Successful DHCP Address.png	Saved testing evidence
Router_to_PC0_VLAN20_SUCCESS.png	Saved testing evidence
Test1_Admin_Gateway_PASS.png	Saved testing evidence
Test2_Admin_to_Packhouse_PASS.png	Saved testing evidence
Test3_Admin_to_Router_PASS.png	Saved testing evidence
VLAN SVI Status Verification All VLAN Interfaces UpUp.png	Saved testing evidence
Voice VLAN 40 ACL Isolation Verification – Admin and Packhouse Networks Blocked.png	Saved testing evidence
Voice VLAN 40 DHCP Address Assignment Verification.png	Saved testing evidence
Voice VLAN 40 Gateway Connectivity Test – Successful.png	Saved testing evidence
Voice VLAN 40 Isolation Test – Guest VLAN 50 Blocked.png	Saved testing evidence
Voice VLAN 40 Isolation Test – Management VLAN 10 Blocked.png	Saved testing evidence
Voice VLAN DHCP Verification with VOICE_ISOLATION ACL Active.png	Saved testing evidence